




Dimensions

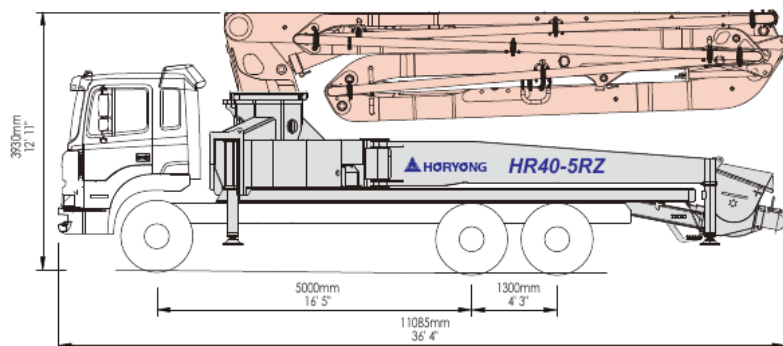

Out Rigger Diagram

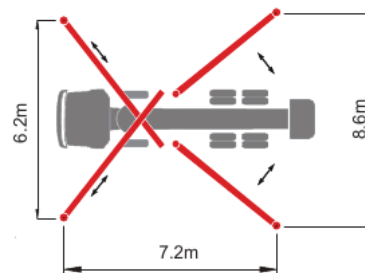

Unfolding height

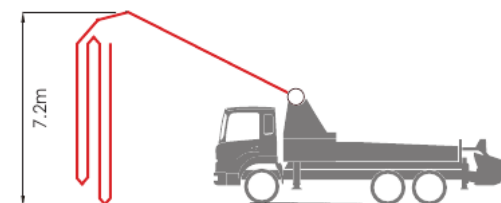

Boom Specification

Spec	U.S.	Metric
Number of Booms	5 Sections	
Folding Type	RZ Folding	
Vertical Reach	130' 3"	39.7 m
Horizontal Reach	117' 2"	35.7 m
Reach Depth	79' 9"	24.3 m
Unfolding Height	23' 7"	7.2 m
Section Articulation	92°/180°/180°/245°/240°	
Rotation	370°	
Delivery Line	5"	125 mm
Proportional Boom	Yes	
End Hose Length	13' 2"	4.0 m
Out Rigger Spread - Front	20' 4"	6.2 m
Out Rigger Spread - Rear	28' 3"	8.6 m

Pump Specification

Spec	U.S.	Metric
Maximum Output	209.3 yd ³ /h	160 m ³ /h
Concrete Pressure	1015 psi	70 bar
Stroke Per Min.	30	
Delivery Cylinder	Ø 9"	Ø 230
Stroke Length	6' 11"	2100 mm
S-Valve	Ø8" x Ø7"	Ø200 x Ø180 mm
Hydraulic System Pressure	5076 psi	350 bar
Hydraulic Pump	Rexroth A11VLO260	
Switching Type	Hydraulic	
Hopper Capacity	21.2 ft ³	600 liter
Max. Aggregate Size	1.6"	40 mm
Water Pump Pressure	290 psi	20 bar
Water Tank Capacity	17.7 ft ³	500 liter

Working Range

